Rotisserie Countertop electric



Countertop 8-spit rotisserie, model SCR-8

General Information

Henny Penny rotisseries are known for turning out full loads of consistently delicious rotisserie items day after day, all day long.

What makes Henny Penny different? You'll get *more* of those delicious whole birds, ribs, pork roasts and other center-of-the plate items every day because the Henny Penny rotisserie simply cooks faster. Patented THERMA-VEC[®] Even Heat Process combines cross-flow convection cooking with radiant heat. The result is thorough, even cooking with uniform browning in a lot less time than other rotisseries.

The single cabinet SCR-8 eightspit countertop rotisserie saves on floor space while cooking up to 40 whole birds in a single load! With nine individual cooking programs available you also have the ability to cook a wide range of menu itmes at the touch of a button. What's more, the sophisticated yet easy-to-use controls let you choose the level of browning you want! Now you can give seasoned and marinated meats, fish and poultry just the right color and crispness that brings customers back for more.

MODEL SCR-8 eight-spit

Henny Penny offers a host of accessories including mobile loading stands, product display units, and merchandising bases that increase your productivity and help you sell more. Spits, rotor disks, drive tube and drip trays are easily removed for cleaning and are available with coated surface.

Standard Features

- High quality stainless steel construction, exterior and interior.
- THERMA-VEC[®] Even Heat Process cooks full loads quickly and evenly:
 - Gentle, cross-flow convection for even cooking throughout the cabinet.
 - Radiant heat for uniform browning and crisp texture.
- Digital electronic controls with 9 programmable cook cycles.
- Programmable browning and texture control.
- Large LED display for simultaneous time and temperature.
- Food temperature probe.

AUTHORIZED SIGNATURE

□ APPROVED

• Spit rotation switch for easy loading.

- Tempered clear glass doors with black matrix shaded borders.
- Auto-stop rotation when doors open.
- Interchangeable spits, racks and baskets.
- Simple three-piece drive tube and rotor assembly.
- Drive assembly, drip trays and drain pans are easily disassembled for quick clean up.
- Easy-to-clean coated parts available separately.

Options

- Curved tempered glass outer door, customer side
- □ Lamp guards

□ RESUBMIT

DATE

Coated spits

Choose standard configuration

- \Box (8) angled spits OR
- □ (8) piercing spits OR
- □ (8) solid bottom baskets OR
- □ (8) wire baskets
- Cabinet/doors:
- □ Solid back
- □ Pass-through
- (If pass-through)
 - Customer side door handle
 - Customer side rotation switch
- Control side door glass
- Clear with black matrix shading

□ Mirrored with black matrix shading

- Mobility
 - □ (4) 3-inch (76 mm) casters
 - □ Adjustable leveling legs
 - □ No casters or leveling legs




□ APPROVED AS NOTED

PROJECT	ITEM NO

Rotisserie Countertop electric

MODEL **SCR-8** eight-spit

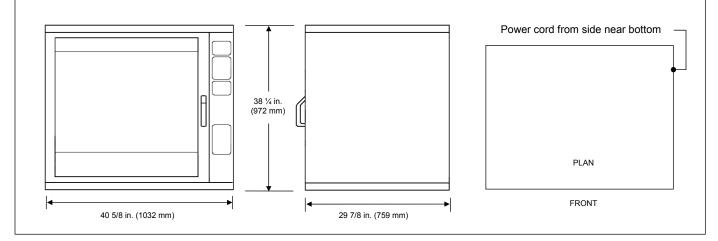

Capacity: 2 1/2 lbs. (1.1 kg) whole birds

32 whole birds, 4 per spit

40 whole birds, 5 per spit

32 whole birds, 4 per spit

Angled spits

Piercing spits

Basket

Electrical

Dimensions

Height:	38 ¼ in. (972 mm)
Width:	40 5/8 in. (1032 mm)
Depth:	29 7/8 in. (759 mm)

Required clearances:

Left:	2 in. (50 mm) air flow
Right:	20 in. (500 mm) service access,
	power cord
Back:	32 in. (813 mm) door open
Front:	32 in. (813 mm) door open

Crated dimensions

Length:	48 in. (1219 mm)
Depth:	37 in. (940 mm)
Height:	48 in. (1219 mm)
Volume:	49.3 cu. ft. (1.40 m ³)

Net weight N/A Crated weight: 471 lbs. (214 kg)

Water connections: N/A

Heating: Electric convection and radiant heat

Lighting: (4) 150W tungsten halogen lamps

Bidding Specifications

- Provide Henny Penny model SCR-8 eightspit countertop electric rotisserie.
- Units shall be constructed of high-quality stainless steel interior and exterior, with tempered door glass.
- Units shall feature patented Therma-Vec Even Heat Process that combines crossflow convection heat with radiant heat for fast, even cooking and browning.
- Units are programmable and feature large LED displays for time and temperature.
- Food probe and probe cooking capability is standard.
- Units will provide customer-controlled browning levels that can be entered as part of a cooking program.
- Choice of solid back or pass-through (2 doors) design.
- Choice of handle, curved outer door glass and rotation switch for customer side and control side.
- Choice of eight angled or piercing spits, or

baskets is standard.

- Spits, rotor disks, drive tube and drip trays are removable for cleaning and are available coated.
- (4) 3 in. (76 mm) casters or leveling legs are available, standard.
- Power cord and plug are shipped with 3phase units, USA and Canada destinations only.



www.hennypenny.com

Continuing product improvement may subject specifications to change without notice.

Laboratory certifications



Plug	Wire	Amps	Watts	Cycle/Hz	Phase	Volts
N/A	2+G	50.5	11100	50/60	1	208
N/A	2+G	46.0	11100	50/60	1	240
NEMA 15-50P	3+G	33.6	11100	50/60	3	208
	3+G	29.1	11100	50/60	3	240
N/A	3NG	19.3	11100	50	3	400