



Project:

Item:

Quantity:

## COMBIVAC BOXER 35 CHAMBER VACUUM SEALER



### FEATURES

- Seal bar length: 13.5"
- Seal bar with two wires, for double security
- Seal bar easily removable for cleaning and maintenance purposes
- Pump capacity: 678 cf/h (19 m<sup>3</sup>/h) Busch vacuum pump
- Pump maintenance and cleaning program
- Machine cycle: 15-30 sec
- **Standard CombiVac control system** with 20 program memory and Sensor control: max. 99.8%, for an optimum and consistent vacuum and cycle time.
- Soft Air to protect the product and vacuum pouch
- Transparent lid, which opens automatically after every cycle
- Deep drawn vacuum chamber
- Comes with insert plates for a faster cycle and product adjustment
- Stainless steel exterior
- 6ft cord with Nema 5-15P plug
- Standard with service kit

### DESCRIPTION

The robust, stainless steel Boxer 35 vacuum sealer is standard equipped with a Busch vacuum pump. This CombiVac table-top model is ETL listed and complies with UL, CSA and CE standards.

### OPTIONS AND ACCESSORIES

- Liquid control
- Inclined insert plate
- Cut-off seal (\$0)
- Wide seal (\$0)
- Label printer
- Food container adaptor
- Cart with castors and shelf



### WARRANTY

Henkelman Inc offers a warranty of 1 year on labor and 3 years on parts. For full warranty details, please refer to [www.henkelman.com](http://www.henkelman.com).

DATE

APPROVAL



FIT FOR FOOD SERVICE

<https://www.henkelman.com/us>

HENKELMAN INC.  
493 W Fullerton Ave  
Elmhurst IL, 60126

**Sales and technical support**

P +1 331 979 2013

F +1 630 359 3875

E [info@henkelmanusa.com](mailto:info@henkelmanusa.com)

**Service and warranty**

P +1 844 208 5685


COMBIVAC VACUUM SEALER BOXER 35 - SPEC SHEET

# COMBIVAC VACUUM SEALER BOXER 35 – SPECS

## COMBIVAC VACUUM SEALER BOXER 35 – SPEC SHEET

### DIMENSIONS

In inches

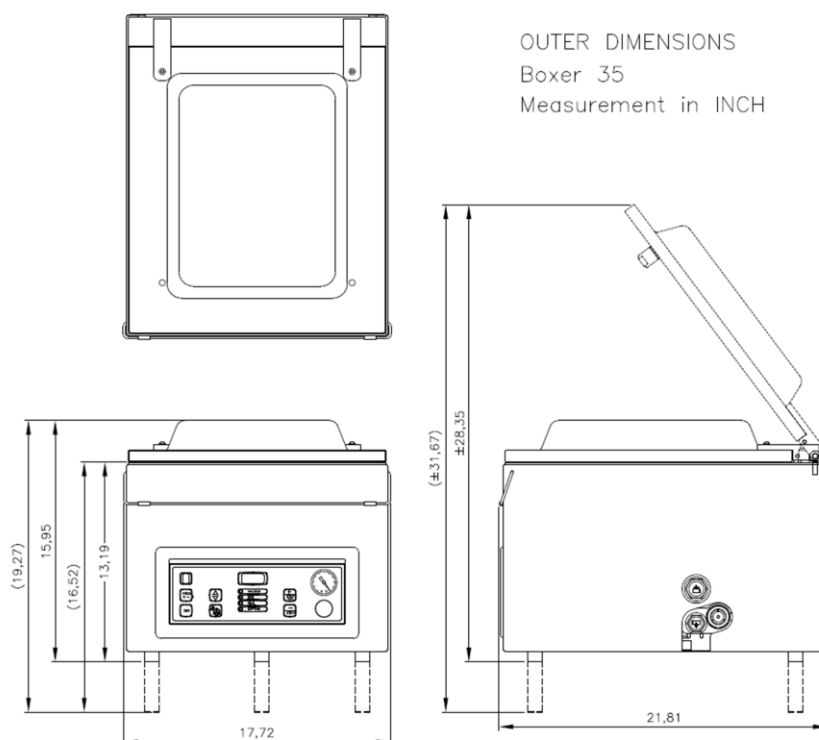

Model	Dimensions (inches)		Volts	Amps	Hz	Pump capacity	HP	Plug	Weight (lbs)
	Chamber (usable space) LxWxH	Machine LxWxH							
Boxer 35 CombiVac	14.5"x13.5"x6"	21.8"x17.7"x15.9"	110-120V	9.5	60Hz	678 cf/h (19 m <sup>3</sup> /h)	0.74	NEMA 5-15P	115

NEMA 5-15P



15 A/125 V



FIT FOR FOOD SERVICE

<https://www.henkelman.com/us>

HENKELMAN INC.  
493 W Fullerton Ave  
Elmhurst IL, 60126

Sales and technical support  
P +1 331 979 2013  
F +1 630 359 3875  
E [info@henkelmanusa.com](mailto:info@henkelmanusa.com)  
Service and warranty  
P +1 844 208 5685